

- 10.4 inches
- Wide viewing angle and high brightness.
- Integrated Intel Atom or ARM.
- Optional touch panel.
- Fully configurable manual and automatic dimmer.
- Metal frame.
- Wide power supply options available.
- Extended range operating temperature.
- LED backlight lifetime min. 50.000h.



General Specification	
Size	10.4 inches
Resolution / Aspect	1024x768 / 4:3
Inputs	Ethernet / USB
Audio	Optional Audio Output Stereo 2x1.5W
Touch	Resistive 5 Wires / Projected Capacitive / None
Power Supply	9-36VDC / 43-160VDC / 14-160VDC
Power Consumption	<20W
MTBF / Lifespan	Controller and LCD: 100.000h Backlight: min. 50.000h
Warranty	24 months
Certification	EN50155*, EN45545*
Mounting Type	Stand Alone
IP	IP42
Mechanical and Environment	
Dimension	(see drawing for details)
Weight	<1.5Kg
Enclosure	Plastic and Aluminum, Powder Paint
Operation Temp.	-20°C to 70°C
Storage Temp.	-30°C to 85°C
Vibrations / Shock	1G 2-500Hz / 10G 11ms
Optical Specification	
Brightness	600 nits / 1000 nits, LED backlight.
Dimmer	Fully configurable Dimmer with Internal Sensor (optional) or External Sensor (optional)
Contrast Ratio	Min 500:1
Viewing Angle	170° H, 170° V
Response Time	16 ms
Optical Finish (optional)	Anti-glare / Anti-reflective / None
Enhancements (Optional)	Sunlight Readable and Transflective Enhancements Available

*Upon Request


Inelmatic Electronics Service Centers
 Europe: Valladolid (Spain)
 Asia: Shanghai (China),
 Americas: Florida (USA), Ontario (Canada),
 Australia: Perth & Melbourne (Australia)

10.4 Inches Embedded Display

EDO1000

CPU Specification (ARM)	
Cores	Quad-core ARM Cortex-A17
Frequency	1.8GHz
DDR	Up to 4G DDR4
Graphics	Mali-T760 MP4 GPU
Storage	Internal 8G eMMC , external TF/SD (Optional)
Watchdog	Configurable watchdog
CPU Specification (Intel)	
Cores	E3815 Single Core / E3825 Dual Core / E3845 Quad Core
Frequency	1.46Ghz / 1.33Ghz / 1.91Ghz
DDR	Up to 4G DDR4
Graphics	Intel Graphics
Storage	Internal 8 to 16G eMMC , external C-FAST / TF
Watchdog	Configurable watchdog
I/O	
Ethernet	1 x Base 10/100, Optional Gigabit, M12 Connector D Coded
USB	USB 2.0 x 1 Type A, USB 2.0 x 1 M12 Connector A coded
Ignition	Integrated digital input for IGN control
RS232/485	RS232 / RS485 Port (M12 Connector) Optional
Digital I/O	8 Input or 4 in 4 Out optional
Video	Optional DVI / HDMI Output
Audio	Optional Line In / Line Out

Drawing

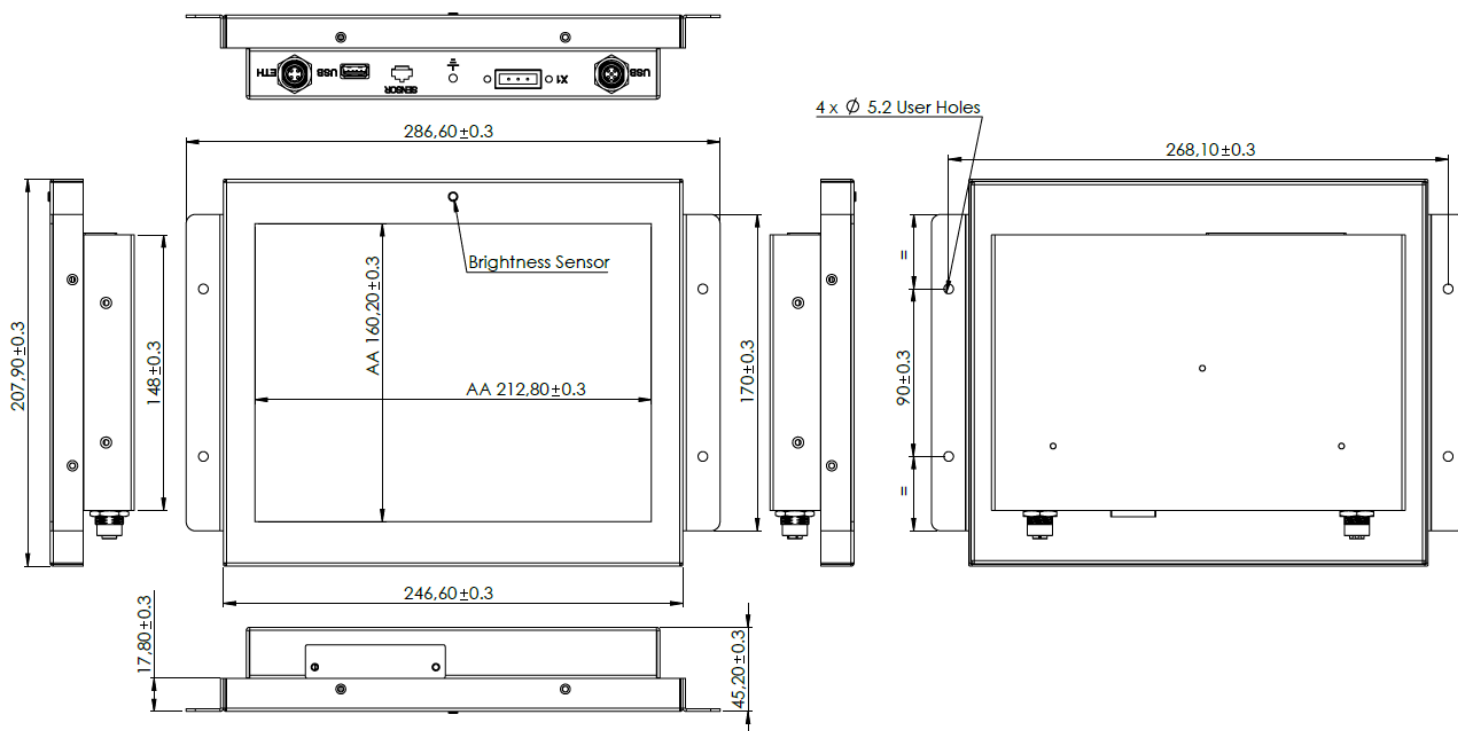

Inelmatic Electronics Service Centers
 Europe: Valladolid (Spain)
 Asia: Shanghai (China),
 Americas: Florida (USA), Ontario (Canada),
 Australia: Perth & Melbourne (Australia)

Images



Ordering Information

Model	CPU	RAM/Flash	I/O	Interfaces	Power Supply	Brightness	Touch/Cover
EDO1000HB-UPN-2232-2ND2-1	E3825	2G / 32G	None	Ethernet	9-36VDC	600 nits	PCAP
EDO1000HB-UPN-R28-2ND2-1	ARM	2G / 8G	None	Ethernet	9-36VDC	600 nits	PCAP

Custom Options

Inelmatic Electronics Service Centers
 Europe: Valladolid (Spain)
 Asia: Shanghai (China),
 Americas: Florida (USA), Ontario (Canada),
 Australia: Perth & Melbourne (Australia)