

10.1 Inches Touch Monitor

XF1010

- 10.1 inches WUXGA monitor.
- High brightness and wide viewing angle.
- Resistive / projected capacitive touch panel.
- Optional Fully configurable manual and automatic dimmer.
- Slim frame and reduced depth.
- Power supply 9-36VDC.
- -20°C to 70°C operating temperature.
- LED backlight lifetime min. 50.000h




General Specification	
Size	10.1 inches
Resolution / Aspect	1920 x 1200px / 16:10
Inputs	LVDS/VGA/HDMI/DVI (Factory Selectable).
Audio	Internal Speakers (2 x 1.5W) (Optional)
Touch	Resistive 4 or 5 Wires / Projected capacitive. I2C/USB/RS232
Power Supply	9-36V DC
Power Consumption	10W
MTBF / Lifespan	Controller and LCD: 100.000h Backlight: min. 50.000h
Warranty	24 months
Certification	Optional
Mounting Type	VESA75 (customization available)
Mechanical and Environment	
Dimension	See drawing
Weight	0.7Kg
Enclosure	Plastic and Aluminum, Wet Paint
Operation Temp.	-20°C to 70°C
Storage Temp.	-25°C to 80°C
Vibrations / Shock	1G 2-500Hz / 10G 11ms
Optical Specification	
Brightness	600 nits, LED backlight.
Contrast ratio	900:1
Viewing Angle	160° H, 160° V
Response Time	30 ms
Optical Finish	Anti-glare/Anti-reflective (Optional)
Enhancements	Sunlight Readable and Transflective Enhancements Available

Inelmatic Electronics Service Centers
 Europe: Valladolid (Spain)
 Asia: Shanghai (China),
 Americas: Florida (USA), Ontario (Canada),
 Australia: Perth & Melbourne (Australia)

10.1 Inches Touch Monitor

XF1010

Drawings

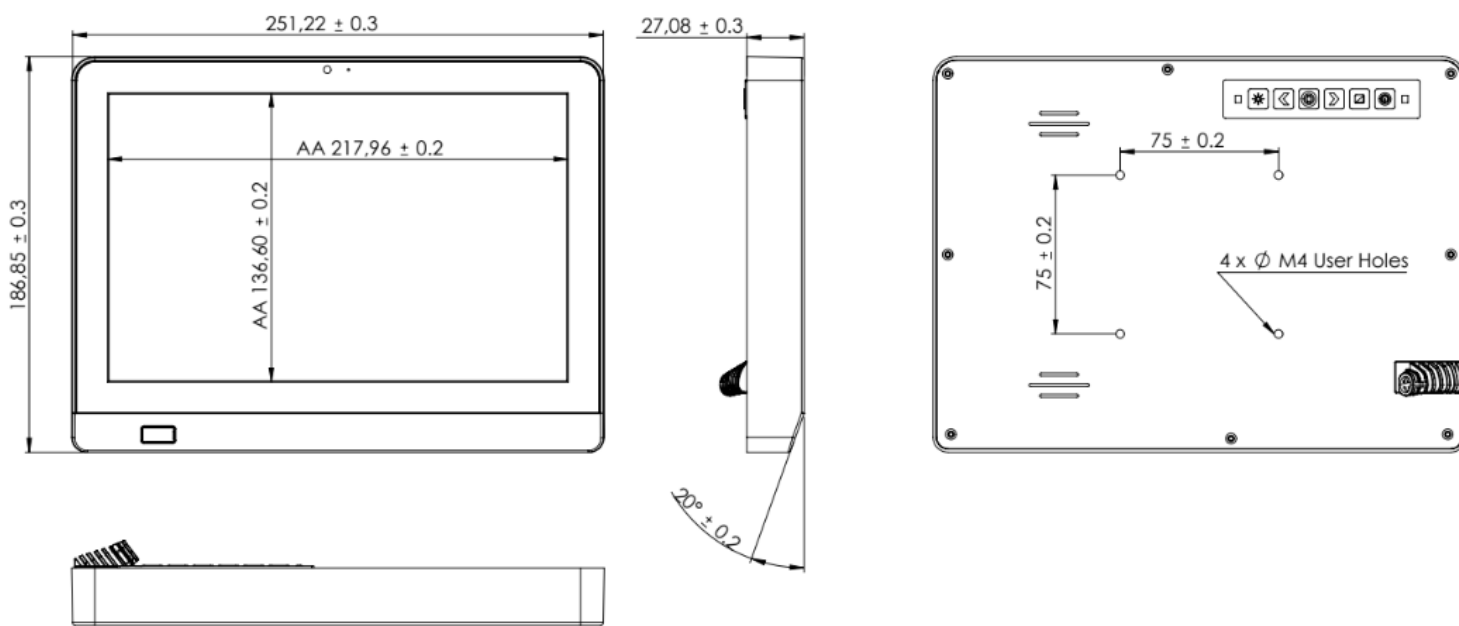

Images



Ordering Information

Model	Size	Resolution	Brightness	Optical Finish	Touch	Input	Voltage
XF1010HB-RPN-VNA-DND0-1	10.1"	1920x1200	600	AG	PCAP RS232	VGA	9-36Vdc

Accessories

Inelmatic Electronics Service Centers
 Europe: Valladolid (Spain)
 Asia: Shanghai (China),
 Americas: Florida (USA), Ontario (Canada),
 Australia: Perth & Melbourne (Australia)