


## 13.3 Inches Touch Monitor

## XF1330

- 13.3 inches FHD monitor.
- High brightness and wide viewing angle.
- Projected Capacitive touch panel.
- Optional Fully configurable manual and automatic dimmer.
- Slim frame and reduced depth.
- Power supply 9-36VDC.
- -20°C to 70°C operating temperature.
- LED backlight lifetime min. 30.000h

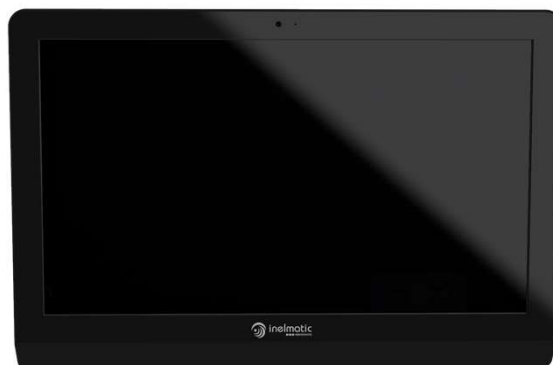



General Specification	
Size	13.3 inches
Resolution / Aspect	1280 x 1080px / 16:9
Inputs	VGA/HDMI/DVI (factory Selectable).
Audio	Internal Speakers (2 x 1.5W) (Optional)
Touch	Projected Capacitive. USB/RS232
Power Supply	9-36V DC
Power Consumption	10-14W
MTBF / Lifespan	Controller and LCD: 100.000h Backlight: min. 30.000h
Warranty	24 months
Certification	Optional
Mounting Type	VESA75
Mechanical and Environment	
Dimension	See drawing
Weight	0.8Kg
Enclosure	Plastic and Aluminum, Wet Paint
Operation Temp.	-20°C to 70°C
Storage Temp.	-35°C to 85°C
Vibrations / Shock	1G 2-500Hz / 10G 11ms
Optical Specification	
Brightness	300/700 nits, LED backlight.
Contrast ratio	1000:1
Viewing Angle	160° H, 160° V
Response Time	14 ms
Optical Finish	Anti-glare/Anti-reflective
Enhancements	Sunlight Readable and Transflective Enhancements Available

Inelmatic Electronics Service Centers  
 Europe: Valladolid (Spain)  
 Asia: Shanghai (China),  
 Americas: Florida (USA), Ontario (Canada),  
 Australia: Perth & Melbourne (Australia)

13.3 Inches Touch Monitor

XF1330

Drawings

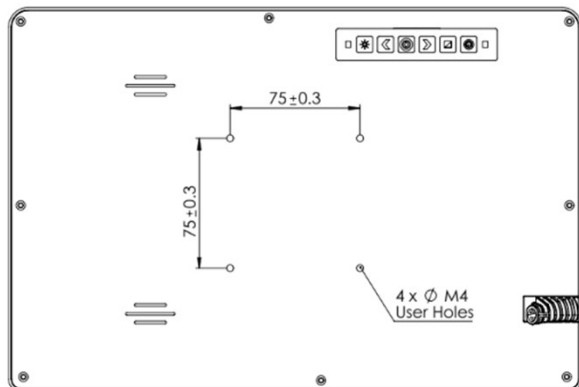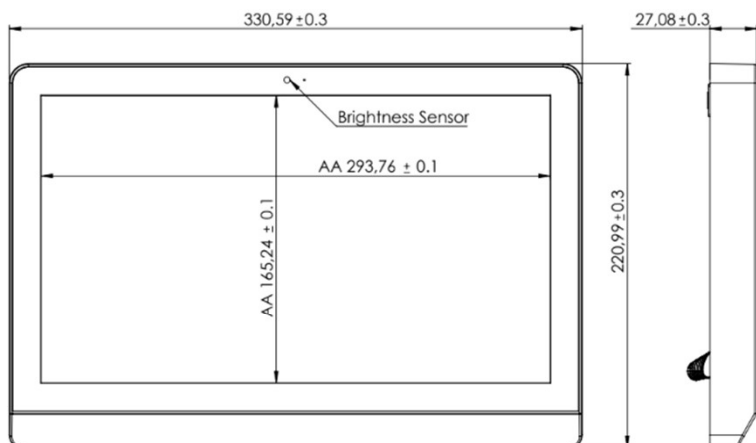

Images



Ordering Information

Model	Size	Resolution	Brightness	Enhancement	Touch	Input

Accessories

--	--	--	--	--	--	--

Inelmatic Electronics Service Centers  
 Europe: Valladolid (Spain)  
 Asia: Shanghai (China),  
 Americas: Florida (USA), Ontario (Canada),  
 Australia: Perth & Melbourne (Australia)